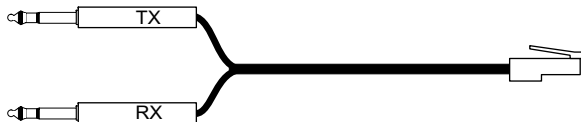


SPECIAL SERVICES

FEATURES / APPLICATION	PART #	DESCRIPTION
Bantam "Y" (Tx & Rx) to RJ48 - (T1), (8') Bantam "Y" (Tx & Rx) to RJ48S - (DDS), (8') (Tx & Rx) from Network Interface Unit "Smart Jack" - T1, or from DDS (RJ48S)	400248 400248S	BANTAM "Y" to RJ48 
310 "Y" (Tx & Rx) to RJ48 - (T1), (8') 310 "Y" (Tx & Rx) to RJ48S - (DDS), (8') (Tx & Rx) from Network Interface Unit "Smart Jack" - T1, or from DDS (RJ48S)	400348 400348S	310 "Y" to RJ48 
15 Pin D (male) to RJ48 - (T1), (8') 15 Pin D (male) to RJ48S - (DDS), (8') T-BERD test set (15 Pin) to Network Interface Unit "Smart Jack" - T1, or DDS (RJ48S)	400415M 400415S	15 PIN "D" to RJ48 
Bantam "Y" (Tx & Rx) to 15 Pin D (male), (8') Bantam "Y" (Tx & Rx) to 15 Pin D (female), (8') (Tx & Rx) from Customer Service Unit (CSU)	400215M 400215F	BANTAM "Y" to 15 PIN "D" 