


HDSL 2/4 Wire Voltage Monitor

H2VM

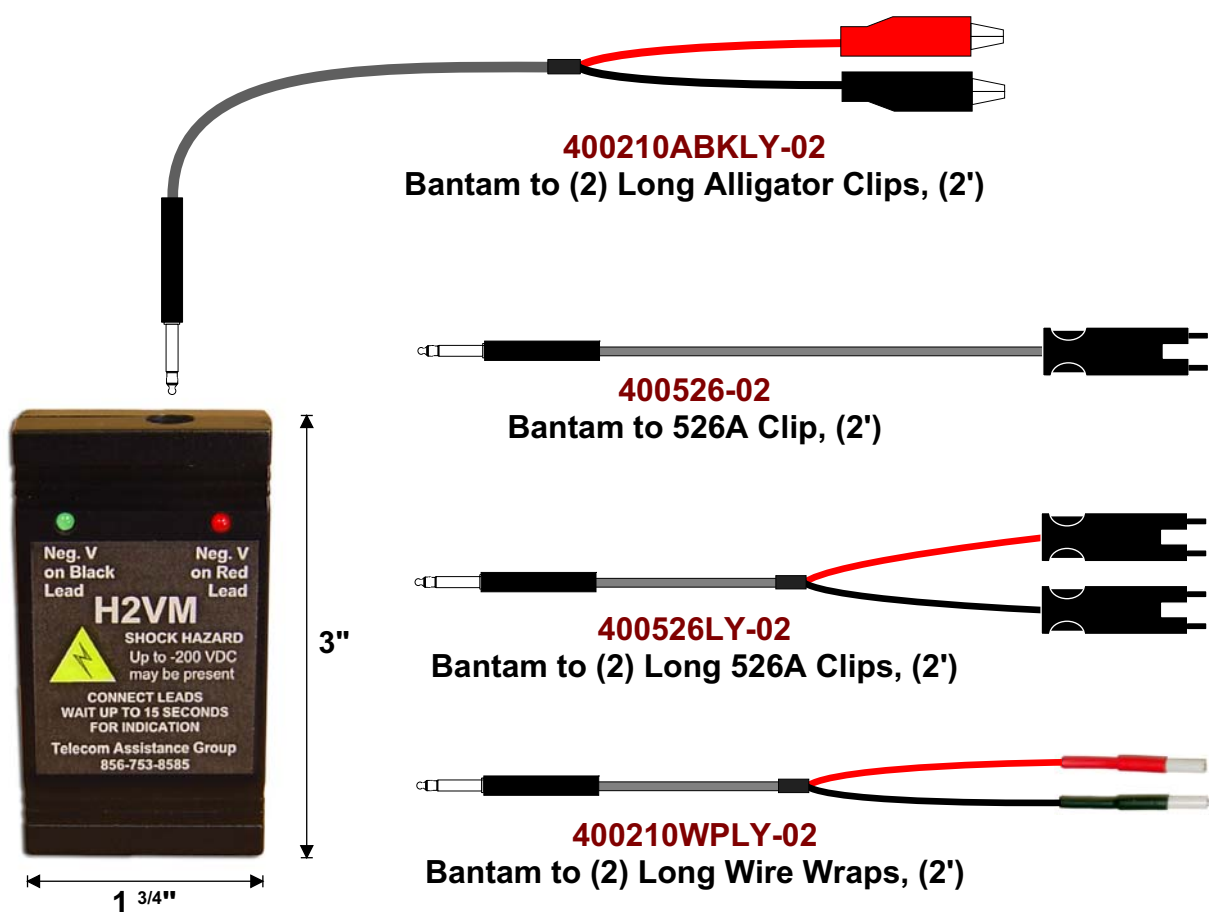

H2VM

HDSL 2/4 Wire Voltage Monitor

Includes belt clip & (1) 400210ABKLY-02 (see above)

Application:

The H2VM Voltage Monitor is used to verify power on HDSL 2 Wire and 4 Wire Circuits at the MDF and other Cross Connect points.

Ordering Information:

H2VM

HDSL 2/4 Wire Voltage Monitor

includes: (1) H2VM & (1) 400210ABKLY-02

VZ ID #
1105 1325

H2VM-KIT01

HDSL 2/4 Wire Voltage Monitor Kit 1

includes: (1) H2VM, (1) 400210ABKLY-02, (1) 400526-02,
(1) 400526LY-02, (1) 400210WPLY-02 & (1) carrying case

Call for Pricing

150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com

Telephone: (856) 753-8585

Fax: (856) 768-7645

Telecom Assistance Group

HDSL 2/4 Wire Voltage Monitor

H2VM

2 Wire (Perform all tests with cable pair open)

Check for voltage at the MDF & Cross Connect points

Test Conditions and Responses	
GREEN Light Illuminates	Negative Voltage on Black Lead
RED Light Illuminates	Negative Voltage on Red Lead
NO Light Illuminates	Circuit Path Open

4 Wire (Perform all tests with cable pairs open)

Check for voltage at the MDF & Cross Connect points

Test Conditions and Responses	
GREEN Light Illuminates	Negative Voltage on Loop 1
RED Light Illuminates	Negative Voltage on Loop 2
NO Light Illuminates	Circuit Path Open

150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com

Telephone: (856) 753-8585

Fax: (856) 768-7645

Telecom Assistance Group