

# Fan Installation Procedure

TF-MC133-02

## REMOVING THE OLD FAN

1. Remove the (4) screws attaching the OLD fan to the Mounting Bracket.
2. Remove the OLD fan from the Mounting Bracket.

**Note:**

TAG's 133mm Fan (# TF-MC133-02) uses the Existing Mounting Bracket.

*New hardware is supplied for installation of the NEW TAG Fan.*

**New hardware includes:**

- (2) Mounting Adapters
- (2) Screws & Washers


## INSTALLING THE NEW FAN

3. Position # TF-MC133-02 into the Mounting Bracket as shown.


**(Note:** *The orientation of the Fan & how the 3 wire cable is dressed through the hole (grommet) located in the corner of the bracket.*

*The connector will push through the rubber grommet. (Refer to FIGURE 2)*

**FIGURE 1, EXISTING BRACKET w/ OLD FAN**

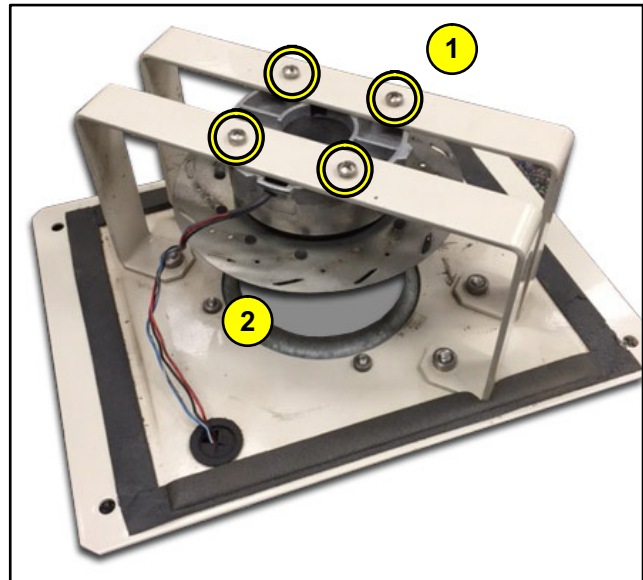

**FIGURE 2, TF-MC133-02 WIRE DRESSING DETAIL**

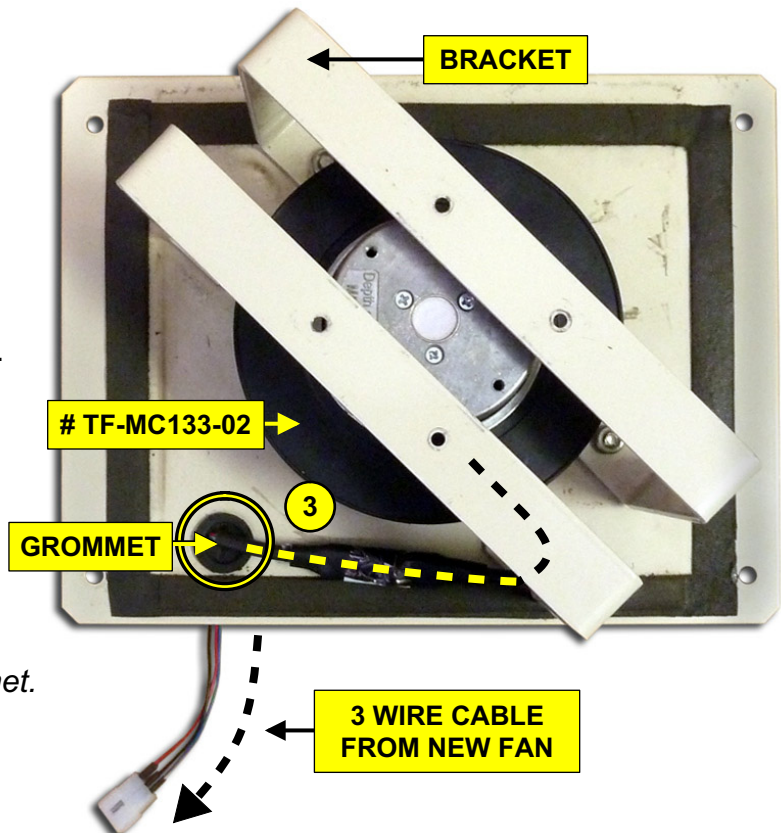

150 Cooper Rd. (F-15)  
W. Berlin, NJ 08091

[www.tagcords.com](http://www.tagcords.com)

Telephone: (856) 753-8585  
Fax: (856) 768-7645

**Telecom Assistance Group**


# Fan Installation Procedure

# TF-MC133-02


- 4. Place the Pins of the (2) supplied Mounting Adapters into the existing holes on TOP of the two bars of the Existing Bracket. (Refer to FIGURES 4.1 & 4.2)

**Note:** The orientation of the Adapters. Screws will be positioned closer to the outside edge of the Fan. (Refer to FIGURE 4.2 & 5)

**FIGURE 4.1, MOUNTING ADAPTER DETAIL**

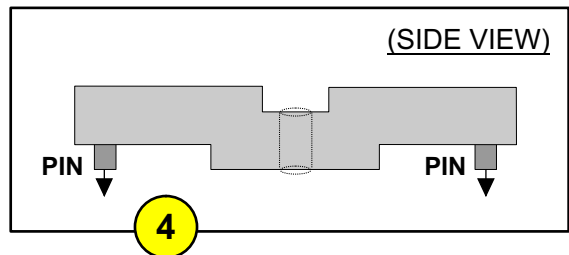

**FIGURE 4.2, MOUNTING ADAPTER DETAIL**

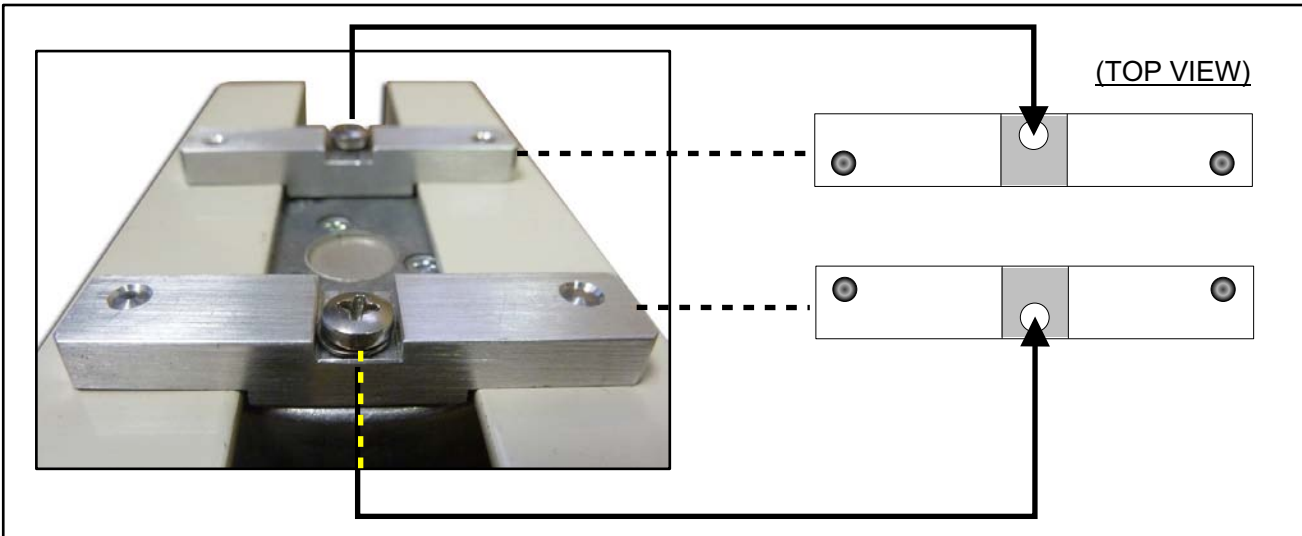

**FIGURE 5, TOP VIEW DETAIL**

- 5. Secure the Mounting Adapters to the Fan & bracket with the (2) Supplied Screws & Washers.

