
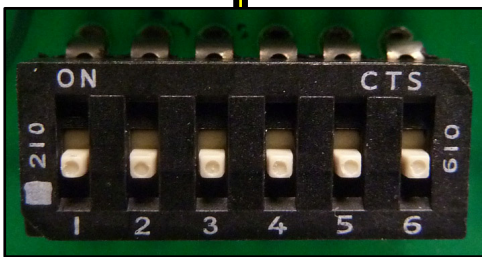


Fan Alarm Control Circuit Board Replacement

TFC-LU4-01

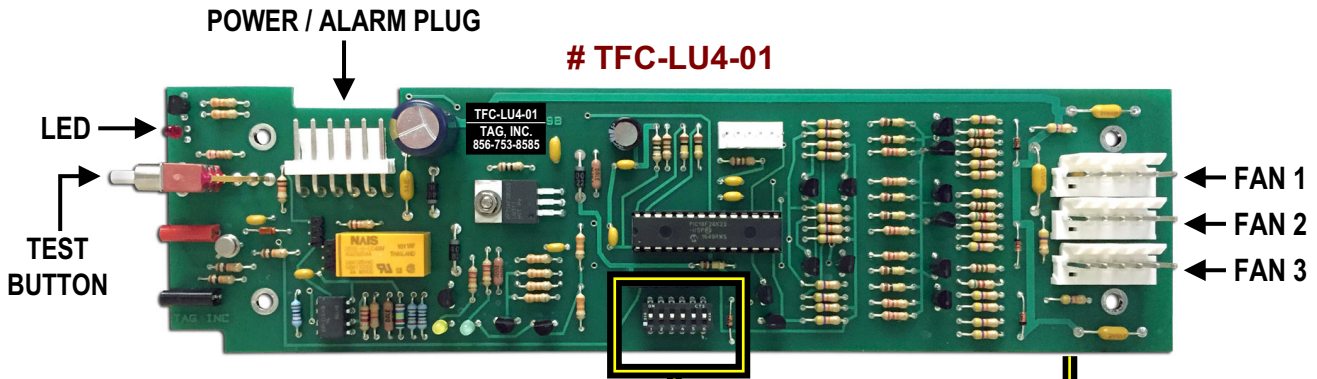

SWITCH SETTINGS		
SW #	POSITION	MEANING
1 & 2	OFF*	2 FANS
1 & 2	ON	3 FANS
1 & 2	DIFFERENT	1 FAN
3	OFF*	FPS HIGH = BAD
3	ON	FPS LOW = BAD
4	OFF*	USE TEMP SENS
4	ON	MANUAL
5	OFF*	FAST
5	ON	MEDIUM
6	OFF*	N/U

* OFF is the default switch setting

1. Plug in Existing Power Cable
2. Plug in up to (3) Fans

CUSTOMER SUPPLIED FAN TRAY**

*** use in Lucent 4A/4B, 4G/SLC2000 Fan Trays & 114A Control Unit*

FAN TEST SETTINGS		
TEST BUTTON	LED	MEANING
START	OFF	NORMAL OPERATION, NO ALARM
1ST PRESS	FAST BLINK	FANS RUN AT FULL SPEED
2ND PRESS	MEDIUM BLINK	FANS RUN AT MEDIUM SPEED
3RD PRESS	SLOW BLINK	FANS RUN AT SLOW SPEED
4TH PRESS	OFF	BACK TO NORMAL OPERATION AGAIN

150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com

Telephone: (856) 753-8585
Fax : (856) 768-7645

Telecom Assistance Group