



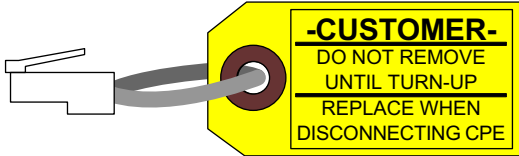

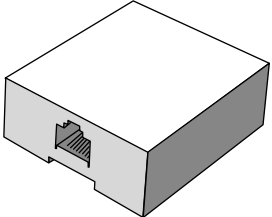


FEATURES / APPLICATION	FTR UPN #	DESCRIPTION
<p>9 Pin D (female) to RJ45, (6')</p> <ul style="list-style-type: none"> Used from Laptop (9 pin male on Laptop) to Catena Network ADSL card (RJ45 jack on card) 	<p>400722ADSL</p>	<p>9 PIN D (female) to RJ45</p> 
<p>Bantam "Y" (Tx & Rx) to RJ48C- (T1), (8')</p> <ul style="list-style-type: none"> Commonly used to Transmit (TX) and Receive (RX) from T1 tests The RJ48C plugs into the faceplate of T1 cards allowing test access 	<p>400248</p>	<p>BANTAM "Y" to RJ48C, (8')</p> 
<p>RJ48 (T1) to 4 Alligator Clips, (6')</p> <ul style="list-style-type: none"> 597243 Alligator Clip Access to RJ48 (Pins 1,2,4,5) 	<p>400448A4-06</p>	<p>RJ48 (T1) to 4 ALLIGATOR CLIPS, (6')</p> 
<p>RJ45 to 6A Alligator Clips, (6')</p> <ul style="list-style-type: none"> General Purpose Test Cord - ISDN (Tip - Pin 5, Ring - Pin 4) 	<p>400448A2</p>	<p>RJ45 to 6A ALLIGATOR CLIPS</p> 
 <p>FTR UPN # 400448LP Temporary RJ48 Looping Plug</p> <ul style="list-style-type: none"> Used to loop "Smart Jack" to provide a physical loop 	 <p>FTR UPN # RJ48-C RJ48 Coupler</p> <ul style="list-style-type: none"> General purpose adapter 	 <p>FTR UPN # RH-RJ48FMB RJ48 Female Mounting Block</p> <ul style="list-style-type: none"> General purpose adapter