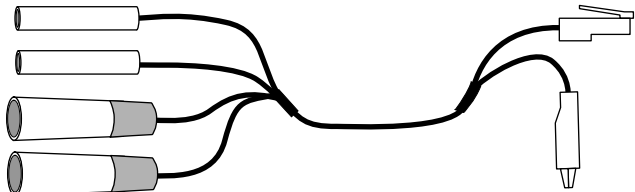


SPECIAL SERVICES

FEATURES / APPLICATION	PART #	DESCRIPTION
Bantam to 317 Pair Clip, (6') Pair Clips allow access to twisted pair without cutting cable	400210PC	BANTAM to 317 PAIR CLIP 
RJ48 (ISDN) to Protector, (6') - Test cord used from TPI (ISDN) test set (RJ48 - ISDN) to coil (protector) access - Pin 4 - Ring/Pin 5 - Tip (RJ48)	400550ISDN	RJ48 (ISDN) to PROTECTOR 
TPI to Teltrend AUA 52C Cord, (8') Used for TPI (Bantam "Y") / Audio "Y" to RJ48 Teltrend AUA52C w/ alligator for ground	400448TPI	TPI to TELTREND AUA 52C CORD 
Fireberd to Teltrend AUA 52C Cord, (8') Used for Fireberd Test set (Bantam "Y") / 9 Pin male to RJ48 Teltrend AUA52C w/ alligator for ground	400448FB	FIREBERD to TELTREND AUA 52C CORD 