
## "Tellabs 1000 HD"

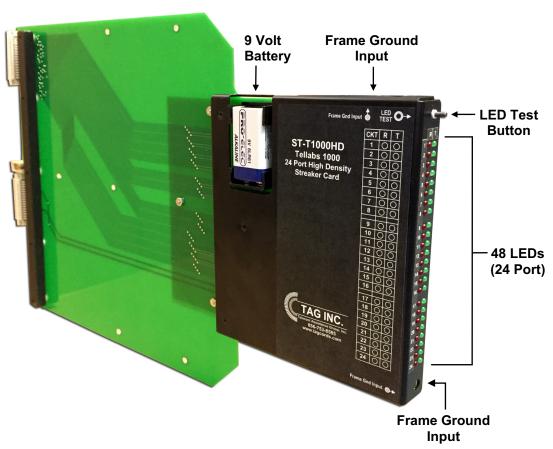

## **Application:**

The ST-T1000HD is used during installations to quickly "streak", verify wiring continuity, from the backplane of the Tellabs 1000 to the Frame. At the MDF, Tester 2 will ground the connection point and the Streaker Card will light the LED associated with that connection. The wiring label on ST-T1000HD indicates 48 LED's for 24 circuits. The ST-T1000HD is powered by a 9-Volt battery.

## **Ordering Information:**

ST-T1000HD Tellabs 1000 High Density Streaker Card Call for Pricing

24 Port (w/ 48 LEDs)

600209F Carrying Case

150 Cooper Rd. (F-15) W. Berlin, NJ 08091

www.tagcords.com

**Telecom Assistance Group** 

Telephone: (856) 753-8585

Fax: (856) 768-7645