



## DMS/100/10 Current Loop Adapters & Accessories

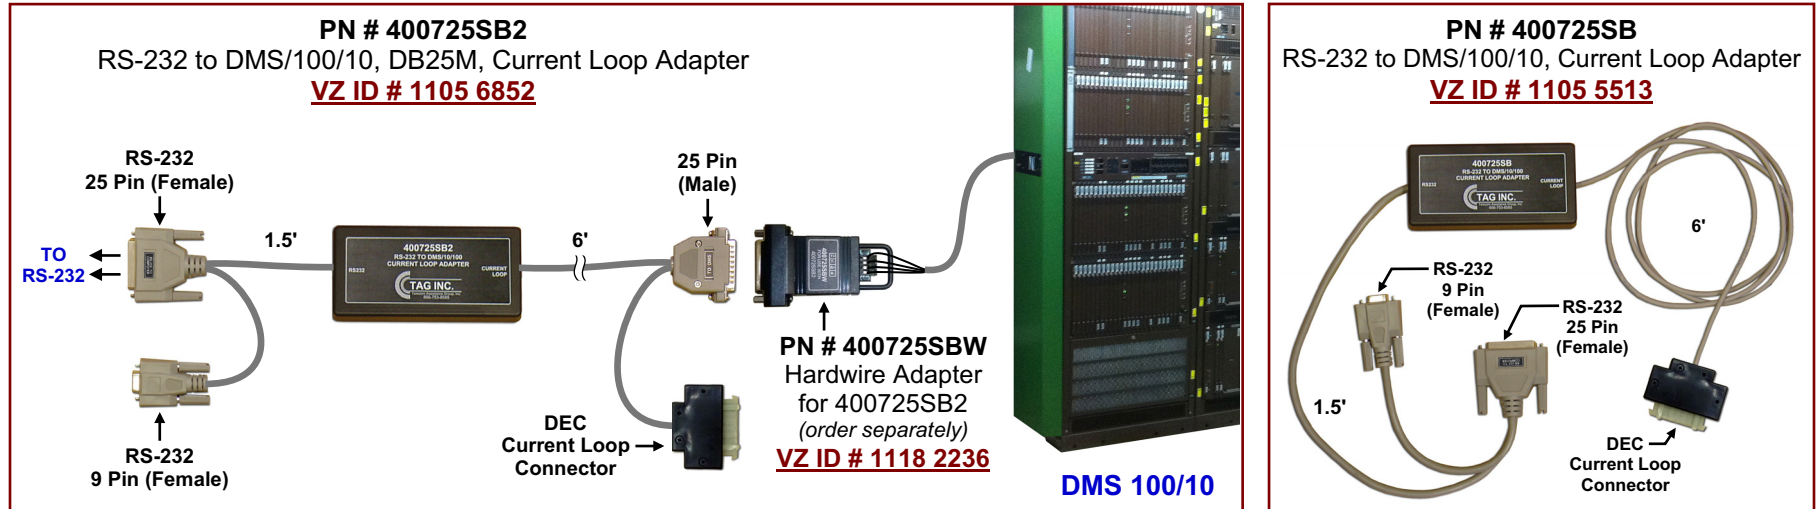

### Application:

TAG's Current Loop Adapters (PN# 400725SB & 400725SB2) are used to program and troubleshoot a DMS. The Hardwire Adapter (PN # 400725SBW) connects the TX (+/-) and RX (+/-) current loop wires to a 25 Pin female connector. It is used with the 400725SB2 Current Loop Adapter when the DMS 100/10 System doesn't have a DEC connector.

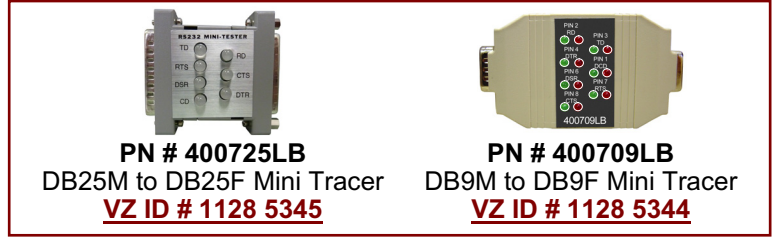

### Ordering Information:

		<b>VZ ID #</b>
400725SB	RS-232 to DMS/100/10 Current Loop Adapter	1105 5513
400725SB2	RS-232 to DMS/100/10, DB25M Current Loop Adapter	1105 6852
400725SBW	Hardwire Adapter for 400725SB2	1118 2236
400725LB	DB25M to DB25F Mini Tracer	1128 5345
400709LB	DB9M to DB9F Mini Tracer	1128 5344
400725NL	DB25F to DB25M (Orange) Null Adapter <i>(not shown)</i>	1128 5343
400721D-12	DMS Interface Cord, Dual Bantam to DB25F, (12') (used with 400725SB2) <i>(not shown)</i>	1105 6851
400725SBPS	Power Supply for 400725SB/2 <i>(optional - not shown)</i>	1118 2238
TT-DCA5-PP	Replacement Power Pack for Single/Dual Session Terminals, 5VDC <i>(not shown)</i>	1136 2015

150 Cooper Rd. (F-15)  
W. Berlin, NJ 08091

www.tagcords.com  
**Telecom Assistance Group**

Telephone: (856) 753-8585  
Fax: (856) 768-7645