
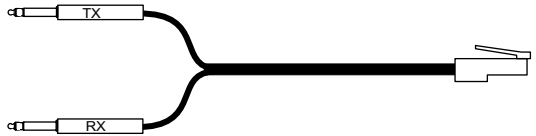

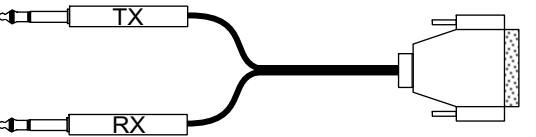


FEATURES / APPLICATION	PART #	DESCRIPTION
<p>Porta (non-bridging) to Alligator Clips, (3')</p> <ul style="list-style-type: none"> Test access at Porta type (coils) 	<p>400300SP-03</p> <div style="background-color: black; color: white; padding: 2px; text-align: center; font-weight: bold;"> AT&T PID # ATT.100001293 </div>	<p>PORTA to ALLIGATOR CLIPS</p> 
<p>Bantam "Y" (Tx & Rx) to RJ48C- (T1), (8')</p> <ul style="list-style-type: none"> Commonly used to Transmit (TX) and Receive (RX) from T1 tests The RJ48C plugs into the faceplate of T1 cards allowing test access 	<p>400248-08</p> <div style="background-color: black; color: white; padding: 2px; text-align: center; font-weight: bold;"> AT&T PID # ATT.100000707 </div>	<p>BANTAM "Y" to RJ48C</p> 
<p>Bantam "Y" (Tx & Rx) to RJ48S - (DDS), (8')</p> <ul style="list-style-type: none"> Commonly used to Transmit (TX) and Receive (RX) from DDS tests The RJ48S plugs into the faceplate of DDS cards allowing test access 	<p>400248S</p> <div style="background-color: black; color: white; padding: 2px; text-align: center; font-weight: bold;"> AT&T PID # ATT.100000735 </div>	<p>BANTAM "Y" to RJ48S</p> 
<p>310 "Y" (Tx & Rx) to 15 Pin D (male), (4')</p> <ul style="list-style-type: none"> Commonly used to Transmit (TX) and Receive (RX) from Customer Service Unit (CSU) from T1 test sets 3101596 Also used with T1 power lids 	<p>400315M-04</p> <div style="background-color: black; color: white; padding: 2px; text-align: center; font-weight: bold;"> AT&T PID # ATT.100000761 </div>	<p>310 "Y" to 15 PIN D (male)</p> 
<p>RJ48 (T1) to 4 Alligator Clips, (6')</p> <ul style="list-style-type: none"> 597243 Alligator Clip Access to RJ48 (Pins 1,2,4,5) 	<p>400448A4-06</p> <div style="background-color: black; color: white; padding: 2px; text-align: center; font-weight: bold;"> AT&T PID # ATT.100000647 </div>	<p>RJ48 (T1) to 4 ALLIGATOR CLIPS</p> 