

7330 VRAD* Fan Replacement - Quick Install Template Guide**TF-ALC7330-4**

TF-ALC7330-4

Alcatel 7330 VRAD Fan Kit
w/ Quick Install Template Plate

Included w/ this Kit:

- (4) Alcatel 7330 VRAD 48V Fans w/ Guard Grills
- (1) Wiring Harness w/ Hardwired DB15F
- includes spare mounting hardware,
- (2) 4-40x3/8 Pan Head Screws
- (2) Lockwashers
- (10) Spare Flat Head Fan Screws

Recommended Tools:

- (1) # 2 Phillips Screwdriver
(for fan screws)
- (1) # 1 Phillips Screwdriver
(for DB15F screws)



↑
Quick Install Template Plate
(Quick & Easy Installation -
Flip this template over onto your fan tray)

3FE 24322 (XXXX) Fan Tray
HECI: VAPQAFZFAD



**KIT SHOWN MOUNTED
IN EXISTING VRAD FAN TRAY ****
**(VRAD FAN TRAY IS NOT INCLUDED)

Look us up on  **YouTube** for Video Instructions for this Quick Install Guide


150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com
Telecom Assistance Group

Telephone: (856) 753-8585
Fax : (856) 768-7645

7330 VRAD* Fan Replacement - Quick Install Template Guide

TF-ALC7330-4

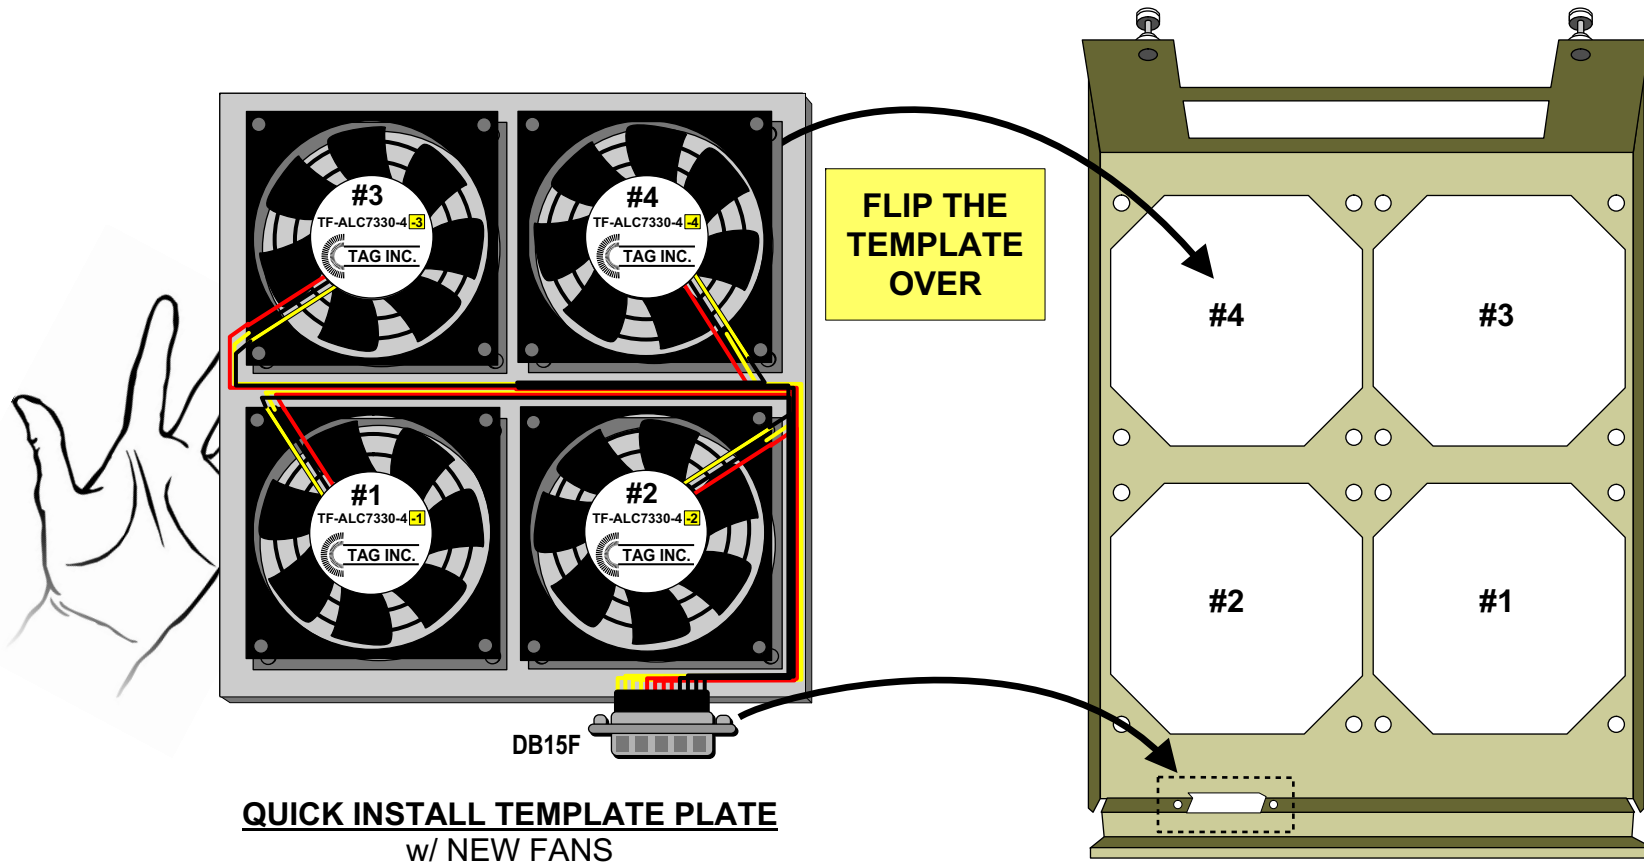

EASY INSTALL -
Place the Template Plate fan side down onto the empty fan tray
 - Line up the DB15F plug on template to the DB15 connector opening on fan tray


150 Cooper Rd. (F-15)
 W. Berlin, NJ 08091

www.tagcords.com
Telecom Assistance Group


Telephone: (856) 753-8585
 Fax: (856) 768-7645

7330 VRAD* Fan Replacement - Quick Install Template Guide


TF-ALC7330-4

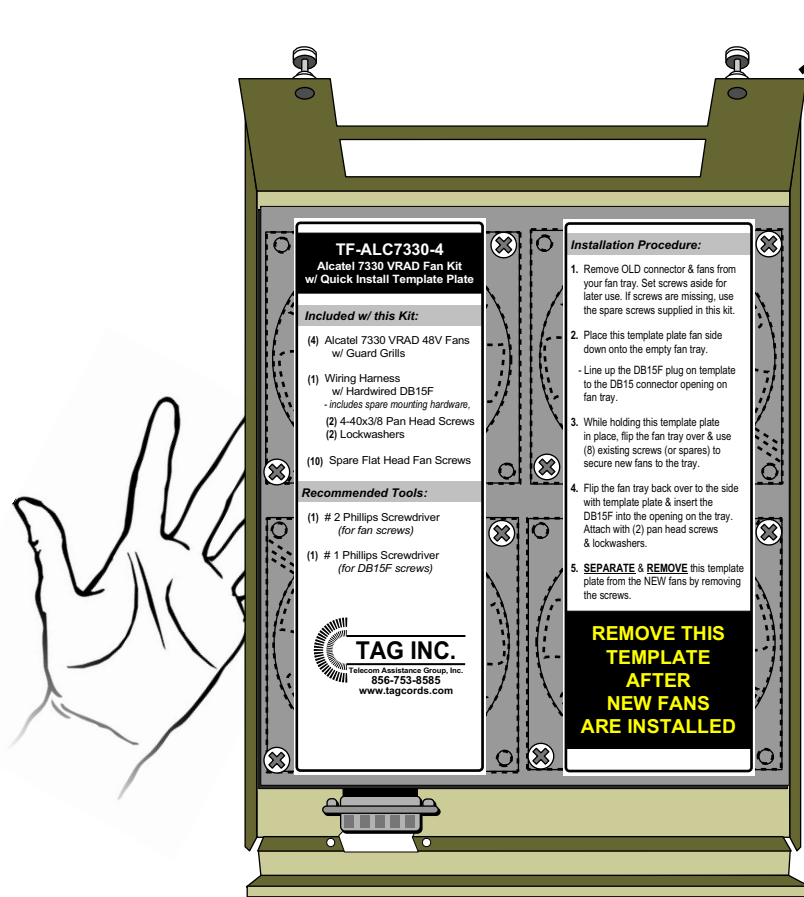

**TEMPLATE PLATE w/ NEW FANS
INVERTED OVER THE INSIDE OF THE TRAY**

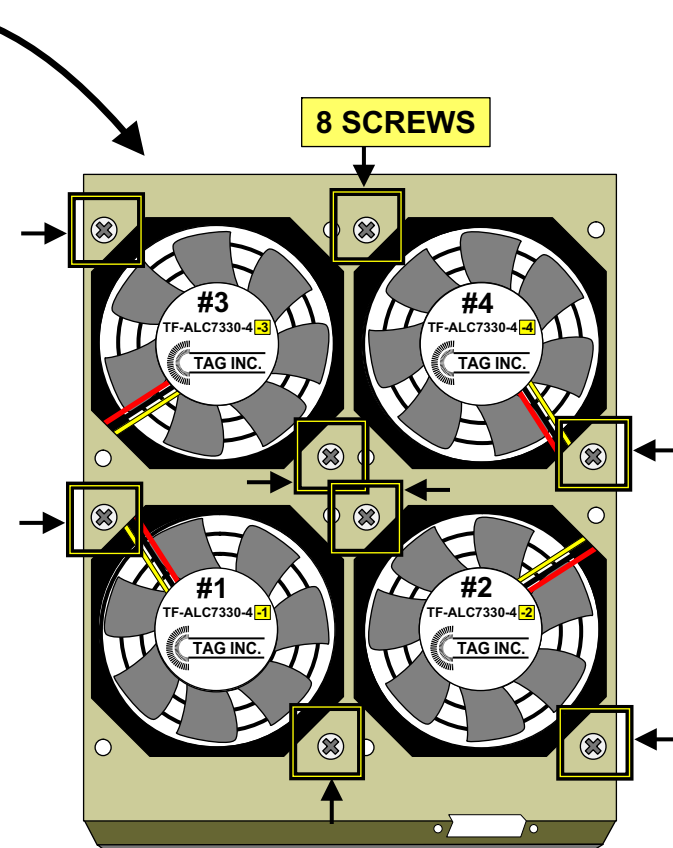

**TRAY WITH NEW FANS
EXTERNAL VIEW**



Flat Head
Screws

- While holding the Template Plate in place, flip the fan tray over

- Use the (8) existing screws (or spares) to secure the New Fans to the tray


150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com
Telecom Assistance Group

Telephone: (856) 753-8585
Fax : (856) 768-7645

7330 VRAD* Fan Replacement - Quick Install Template Guide

TF-ALC7330-4

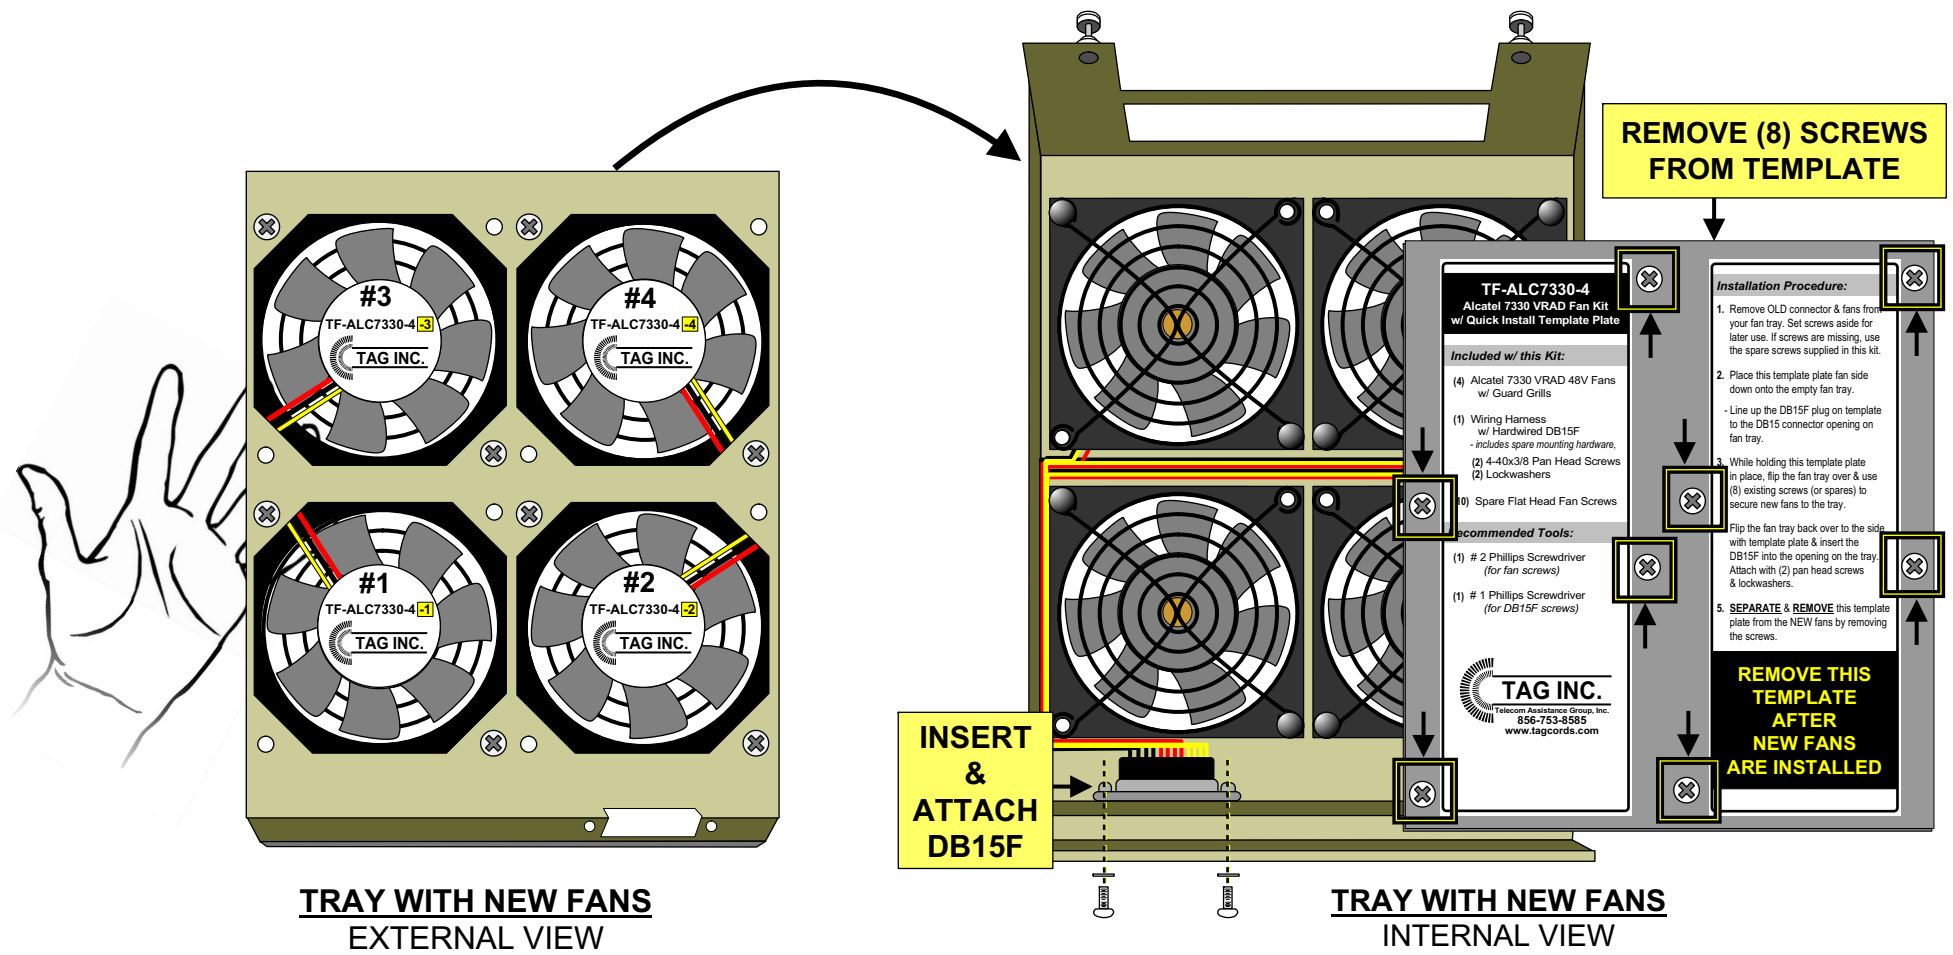

**TRAY WITH NEW FANS
EXTERNAL VIEW**

**TRAY WITH NEW FANS
INTERNAL VIEW**

- Flip the Fan Tray back over to the side with the Template Plate

- Insert the DB15F into the opening on the tray
 - Attach with (2) Pan Head Screws & Lockwashers
 - **SEPARATE & REMOVE** the Template Plate from the New Fans by removing the screws

150 Cooper Rd. (F-15)
 W. Berlin, NJ 08091

www.tagcords.com
Telecom Assistance Group

Telephone: (856) 753-8585
 Fax : (856) 768-7645